 wallmounting fasteners not included
VESA mount 481A70 not included

3 MOUNTING HEIGHTS FOR VESA 481A70

© COPYRIGHT – Datasheet (A00000870 rev. 00) – note: product specifications may change without prior notice.




BalanceBox® 650-II features

- Manual Height Adjustable mount for large format Interactive Touch Panels
- Weight balancing capacity up to 220 kg / 485 lb. (depending on model)
- No maximum panel size (limited by maximum weight)
- Travel 25.6" / 650 mm
- Safest and fastest manual Height Adjustable Mount on the market, with very low operating force
- Worldwide patented BalanceBox® spring balancing technology
- Quick and improved mounting
- Flexibility through 3 VESA mounting positions

Optional accessories:

- BalanceBox® universal VESA bracket
- Winx® 4b Whiteboard frames
- BalanceBox® 650 Mobile Stand
- BalanceBox® 650 Floor support

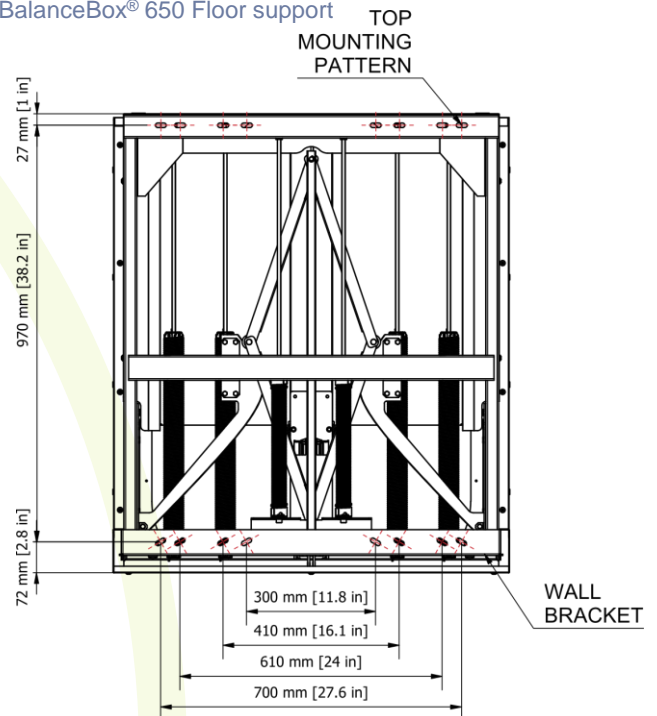

BalanceBox® 650 Wall mounting pattern
(hardware for wall-mounting not included)

Part Numbers

484A17	BalanceBox® 650-II Light - Weight range: 34 – 68 kg 75 – 149.5 lb.*
484A18	BalanceBox® 650-II Medium - Weight range: 67 – 127 kg 148 – 279 lb.*
484A19	BalanceBox® 650-II Heavy - Weight range: 94 – 162 kg 207 – 356 lb.*

* Add up the weights of your touchscreen, VESA bracket and accessories, to determine which BalanceBox® 650 you need

Dimensions	Length	Width	Height	Weights 484A17	Weights 484A18	Weights 484A19
Product dimensions	42" [1067 mm]	36.4" [924 mm]	6.3" [161 mm]	151.4 lb. [68,8 kg]	160.6 lb. [73 kg]	163.9 lb. [74,5 kg]
Shipping dimensions (boxed)	45.7" [1160 mm]	37.6" [960 mm]	7,1" [180 mm]	162.4 lb. [73,8 kg]	171.6 lb. [78 kg]	174,9 lb. [79,5 kg]
Pallet dimensions (5 pcs on a pallet)	47.25" [1200 mm]	39.4" [1000 mm]	42.3" [1074 mm]	865 lb. [393 kg]	911 lb. [414 kg]	928 lb. [422 kg]

Technical specifications

Travel	25.6" [650 mm]
Maximum weight capacity / screen size	Depends on BalanceBox® 650 model (see above tabel) No Maximum Panel size, maximum total weight smaller than 220kg / 485 lb.
VESA bracket / screen interface	VESA bracket 481A70, can be mounted on 3 different heights.
Safety / certification	CE and TUV Baumuster Geprüft (EN-ISO 62368-1)
Material and color	Steel structural parts, powder coated Black RAL9005
Controls	Operate manually